LN-150



Model	LN-150	Model	LN-150	
Measuring Range Distance	0.9 - 130m *1	Communication	W-LAN 802.11 n/b/g, 100m Bluetooth Class 1, Usable range: to 130m *2*3	
Vertical Range	+55° to - 30°	Power Supply		
Measurement Accuracy	Distance accuracy: (3.0 + 2ppm X D)mm	Standard battery	BDC72 lithium-ion battery	
Auto Leveling		Operating time	Approx. 5 hours (continuous use, at 20 C)	
Leveling Range	+/- 3 degree	Dimension	185 (W) x 198 (D) x 322 (H)mm	
Inclination Compensation		Weight	Approx. 4 kg (including battery BDC72)	
Method Working Range	Hydraulic dual-axis inclination sensors +/- 6'	Environmental resistance Operating temperature	-20 - + 50 °C (no condensation) -30 - + 60°C (no condensation)	
Motor		Storage temperature	-50 - + 00 C (110 condensation)	
Motion Range	360° (Horizontal)	Dustproof/Waterproof	IP65	
Maximum Rotation Speed	60° / second (10 rpm)	Note:		
Guide Light			*1 When prism ATP2 or ATP2S is used. Ambient condition: not under severe weather of	
Light Source	LED (Red 626nm/ Green 524nm)	Rain/Fog/Heat Shimmer *2 No obstacles, few vehicles or sources of radio emissions/interference in the near vicinity		
Visible Range	Horizontal > 8° (7m@50m distance)			
Laser Plummet	Light source: Laser diode (Class 2)	of the instrument, no rain	of the instrument, no rain *3 Usage range could be shorter depending on specifications of Bluetooth device to communicate.	
Light Source	LED 635nm	1 0 0		



Standard Components

- Battery BDC72 2 pieces
- Battery Charger CDC77
- Power cable
- Wiping cloth
- Instruction Manual : Read this first (This sheet)
- Laser caution sign-board
- Carrying case
- Export restrictions card (Be sure to read)

Accessories (optional accessories)













360° Prism ATP2

360° Sliding Prism ATP2SII

Pin Pole PP4

Hand Grip SB190 Foot Shoe AP66



TOPCON CORPORATION

75-1 Hasunuma-cho, Itabashi-ku, Tokyo 174-8580, Japan www.topcon.co.jp

<Contact to>

TOPCON POSITIONING ASIA (MALAYSIA) SDN. BHD.

Registration No. 201901043929 (1353259-V) No. 6, Jalan Pensyarah U1/28, Hicom-Glenmarie Industrial Park, 40150 Shah Alam, Selangor Darul Ehsan Email: mys_survey_sales@topcon.com
Web: http://www.topcon.com.my/corporate.html

©2023 Topcon Corporation All rights reserved. P-261-2 TPM

- Specifications may vary by region and are subject to change without notice.
 Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Topcon is under license
- Other trademarks and trade names are those of their respective owners.

Your local Authorized Dealer is:

LN-150



LN-150 Layout Navigator





Easy, Speedy and Convenient The Ultimate Solution for Stake-out Work

- Small & Light weight
- Easy Installation
- Brightness & Visible guide light for guidance
- Operated by mobile phone and tablet
- Ultra-high speed & Quick response

LN-150 Solution

Upgrade Stake-out Work!





Easy one-button self-leveling setup. No need to check the bubble level for the installation.









The Layout Navigator automatically turns and faces to the next stakeout point with the touch on your mobile phone.




Next page

Which type suits you?




3 Major Benefits

- 1. Speed up your stake-out work
- 2. Reach stake-out point by yourself
- 3. Need less manpower

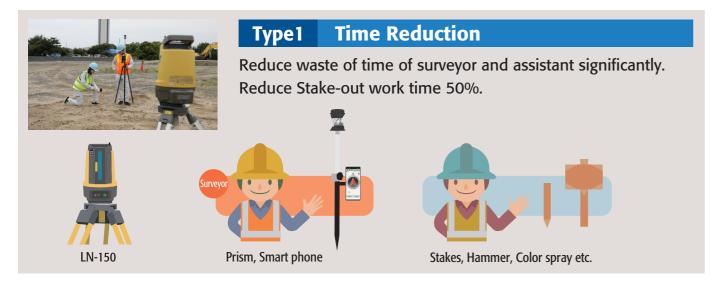



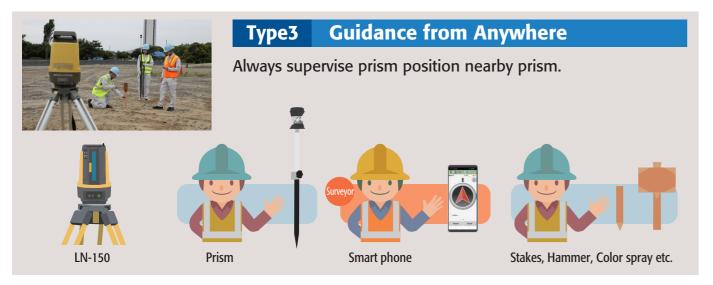


LN-150




3 Major Benefits

- 1. No change of team structure
- 2. No need to look in telescope
- 3. Easy to guide prism

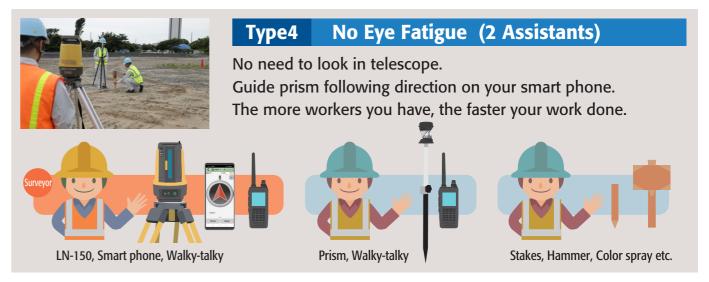



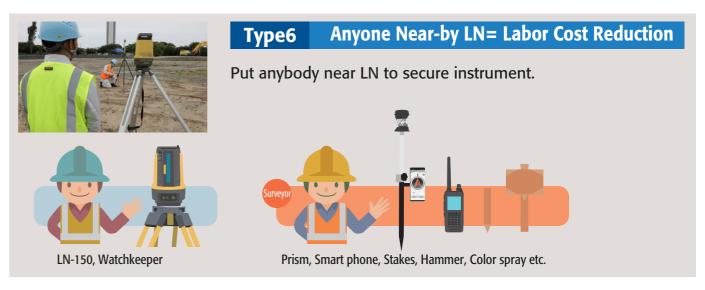

LN-150 **User Voice**





KRIANGKRAI SURVEYING CO., LTD.



Reduce 50 % of Work Time

Why did you choose the LN?

- 1.Duration of stakeout of 50 points reduced from 2-3 hours to 1 hour
- 2.Don't have to look in telescope
- 3. Accuracy is the same with 5 seconds total station

How much did productivity increased?

- 1.Reduced communication time between instrument side and prism side
- 2.Reduce waiting time of people at the prism side to get instruct from the instrument side
- 3.Reduce labor with one-man operation

What is your Return on Investment (ROI)?

1.We paid off after just 2 months. Work time reduction contributed to our profit margin was a lot





Multiple software options for productive stake-out



TopLayout

Basic 3D design data stake-out and topo application.

Freeware downloadable from Google Play!



MAGNET Construct

3D LAYOUT IN THE PALM OF YOUR HAND

- Mobile app for Android and iOS handheld devices
- Built to control robotic total stations, GNSS receivers and Layout navigator
- Longlink technology for a GNSS rover and base connection
- Simple, easy-to-use interface
- Change language and terminology within seconds
- Share files directly via email or through MAGNET
- Secure data transfer, both to and from the field







Simgeum-a Construction Co., Ltd.



What part of LN do you find attractive?

What part of LN do you find attractive?

- 1. Reduce the labor costs by one-man surveying.
- 2. Convenient and efficient to operate the equipment because it can be automatically leveled and tracked.
- 3. Checking the exact location in real time

How much did productivity increased?

1.The overall speed of the operation was five times faster.

Which site is suitable to use LN?

1.It is suitable to use for construction site.





Jobsite Application

Civil Engineering



80% of surveying work at jobsite is Stake-out

Building Construction



Minimize numbers of instrument setups

Solar Panel installation



Survey knowledge doesn't matter